



by

JH INDUSTRIES, INC.

Dockboards and Railboards

REINFORCED CURB ENDS
For maximum strength and service.


TIRE SAVER CURBS for reduced tire wear.

FOLD DOWN LIFT LOOPS
standard on all steel dockboards or railboards.

ENGINEERED CROWN insures stable positioning while providing safety and minimizing wear on loading equipment.

DIAMOND TREADPLATE for high traction and safety.

RUGGED LOCKING LEGS fits between truck and dock to firmly hold ramp into place.

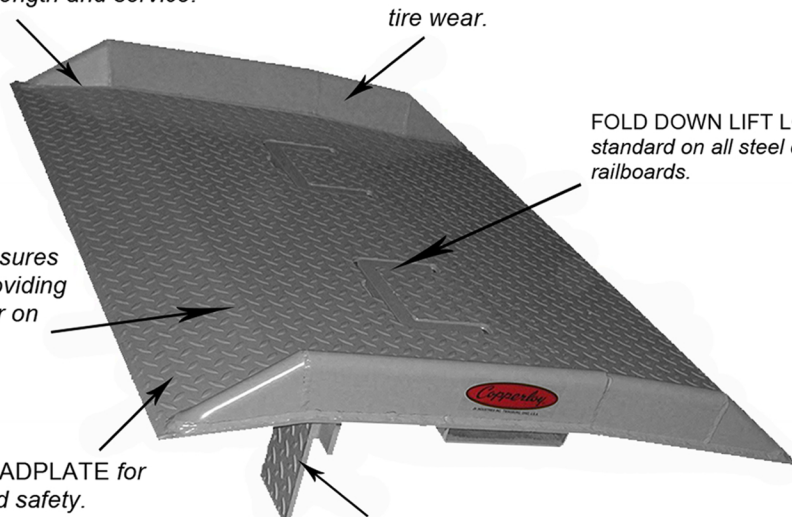

Aluminum Dockboard with Welded Curbs

- Fully welded aluminum curbs for the highest strength.
- Tough aluminum treadplate for lightweight, corrosion-free surface.
- Premium dockboard.
- Mid to rough duty cycles
- Lightweight maneuverability.



Aluminum Dockboard with Bolt-On Steel Curbs

- Structural steel curbs bolted on 6" centers.
- Tough aluminum treadplate deck for lightweight, high traction, corrosion free surface.
- Low cost alternative.
- Light to mid duty cycles.
- Lightweight maneuverability.



Steel Dockboard with Welded Curbs

- Fully welded all steel curbs.
- Heavy steel treadplate deck for high durability and extended service life.
- Most durable for the greatest value.
- Engineered for the toughest duty cycles.
- Several lifting devices available.
- Drop through lift loops standard.
- Lift chains also available.

JH Industries, Inc. 1981 E. Aurora Rd. Twinsburg, OH 44087
PH: (330) 963-4105 (800) 321-4968 FX: (330) 963-4111
www.copperloy.com



Dockplates

- Available in aluminum or steel.
- Used in lighter capacity applications where low height differences exist and safety curbs are not necessary.
- Rugged 1/2" thick steel locking legs attached with high strength, vibration proof fasteners.
- Knuckle saver strap handle.



Ramp-Dockboard Combination

- Available in steel or aluminum.
- Used when a large height difference exists or low clearance equipment creates an excessively long ramp.
- Dockboard section can be used independently.

LIFTING DEVICES

LIFT LOOPS


- Come standard on truck dockboards and railboards.
- Spaced on 24" centers.
- Located 24" from approach end of dockboard to accommodate different fork sizes.

MAGNE-LIFT

- Sleeves loop into slots in the deck of the dockboard and are chained together for storage convenience.
- Assures secure handling.
- Available on all dockboards and railboards.

LIFT CHAINS

- Available in 1 or 2 piece.
- Center hooks disconnect during use.
- Secured to the curb.
- Available on all dockboards and railboards.

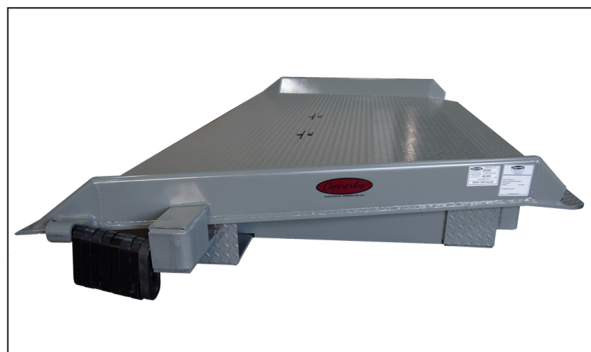

Railboards

- Rugged all welded steel construction.
- Heavy understructure for safety and durability.
- Drop through lift loops or lift chains standard.
- Available in rectangular or flared.
- Heavy understructure spans the gap and locks ramp into place with 8" automatic ring adjustments. (14" max adjustment)
- Available in capacities up to 80,000 lbs.

DOCKBOARD ACCESSORIES

LOCKING PINS

- Locks span manually.
- Used in conjunction with fixed locking legs.
- Locks dockboard in place for uneven dock conditions.
- Allows for 6" of adjustment.
- Greater adjustment available if necessary.

CONVERTERS

- Locks dockboard in place when an uneven dock condition exists or with a park-out situation.
- Available on welded aluminum dockboards.

JH Industries, Inc. 1981 E. Aurora Rd. Twinsburg, OH 44087
PH: (330) 963-4105 (800) 321-4968 FX: (330) 963-4111
www.copperloy.com



Steel Dockboard Specifications (Welded Steel Curbs)

15,000# Gross Capacity

20,000# Gross Capacity

| Width | Length | Height Diff.* | Weight | Model Number | Width | Length | Height Diff.* | Weight | Model Number |
|-------|--------|---------------|-------------|--------------|-------|--------|---------------|--------|--------------|
| 60" | 36" | +5" | 375 | STR15-60-36 | 60" | 36" | +5" | 465 | STR20-60-36 |
| | 42" | +6" | 465 | STR15-60-42 | | 42" | +6" | 575 | STR20-60-42 |
| | 48" | +7 ½" | 515 | STR15-60-48 | | 48" | +7 ½" | 635 | STR20-60-48 |
| | 54" | +8 ½" | 600 | STR15-60-54 | | 54" | +8 ½" | 705 | STR20-60-54 |
| | 60" | +9 ½" | 650 | STR15-60-60 | | 60" | +9 ½" | 770 | STR20-60-60 |
| | 66" | +10 ½" | 700 | STR15-60-66 | | 66" | +10 ½" | 835 | STR20-60-66 |
| | 72" | +12" | 750 | STR15-60-72 | | 72" | +12" | 900 | STR20-60-72 |
| | 78" | +13" | 800 | STR15-60-78 | | 78" | +13" | 1000 | STR20-60-78 |
| | 84" | +14" | 860 | STR15-60-84 | | 84" | +14" | 1060 | STR20-60-84 |
| | 90" | +15" | 945 | STR15-60-90 | | 90" | +15" | 1130 | STR20-60-90 |
| 96" | +16" | 1000 | STR15-60-96 | 96" | +16" | 1200 | STR20-60-96 | | |
| 72" | 36" | +5" | 440 | STR15-72-36 | 72" | 36" | +5" | 540 | STR20-72-36 |
| | 42" | +6" | 545 | STR15-72-42 | | 42" | +6" | 670 | STR20-72-42 |
| | 48" | +7 ½" | 600 | STR15-72-48 | | 48" | +7 ½" | 800 | STR20-72-48 |
| | 54" | +8 ½" | 690 | STR15-72-54 | | 54" | +8 ½" | 825 | STR20-72-54 |
| | 60" | +9 ½" | 750 | STR15-72-60 | | 60" | +9 ½" | 900 | STR20-72-60 |
| | 66" | +10 ½" | 805 | STR15-72-66 | | 66" | +10 ½" | 975 | STR20-72-66 |
| | 72" | +12" | 870 | STR15-72-72 | | 72" | +12" | 1050 | STR20-72-72 |
| | 78" | +13" | 930 | STR15-72-78 | | 78" | +13" | 1160 | STR20-72-78 |
| | 84" | +14" | 995 | STR15-72-84 | | 84" | +14" | 1240 | STR20-72-84 |
| | 90" | +15" | 1,090 | STR15-72-90 | | 90" | +15" | 1320 | STR20-72-90 |
| 96" | +16" | 1,150 | STR15-72-96 | 96" | +16" | 1395 | STR20-72-96 | | |
| 84" | 36" | +5" | 500 | STR15-84-36 | 84" | 36" | +5" | 615 | STR20-84-36 |
| | 42" | +6" | 625 | STR15-84-42 | | 42" | +6" | 765 | STR20-84-42 |
| | 48" | +7 ½" | 670 | STR15-84-48 | | 48" | +7 ½" | 850 | STR20-84-48 |
| | 54" | +8 ½" | 780 | STR15-84-54 | | 54" | +8 ½" | 945 | STR20-84-54 |
| | 60" | +9 ½" | 850 | STR15-84-60 | | 60" | +9 ½" | 1030 | STR20-84-60 |
| | 66" | +10 ½" | 920 | STR15-84-66 | | 66" | +10 ½" | 1120 | STR20-84-66 |
| | 72" | +12" | 990 | STR15-84-72 | | 72" | +12" | 1200 | STR20-84-72 |

*Height differential based on forklift use.

Standard Features:

- 11" Lip (optional 14" Lip)
- 10", 14" and 18" Locking Legs
- 5 ½" Curbs
- Fold down Lifting Loops (Chains can be supplied)



Aluminum Dockboard w/ Bolt-On Steel Curbs Specification

10,000# Gross Capacity

15,000# Gross Capacity

| 10,000# Gross Capacity | | | | | 15,000# Gross Capacity | | | | | |
|------------------------|--------|---------------|-------------|--------------|------------------------|--------|---------------|-------------|--------------|-------------|
| Width | Length | Height Diff.* | Weight | Model Number | Width | Length | Height Diff.* | Weight | Model Number | |
| 54" | 36" | +5" | 118 | ABC10-54-36 | 54" | 36" | +5" | 138 | ABC15-54-36 | |
| | 42" | +6" | 134 | ABC10-54-42 | | 42" | +6" | 162 | ABC15-54-42 | |
| | 48" | +7 ½" | 151 | ABC10-54-48 | | 48" | +7 ½" | 185 | ABC15-54-48 | |
| | 54" | +8 ½" | 172 | ABC10-54-54 | | 54" | +8 ½" | 210 | ABC15-54-54 | |
| | 60" | +9 ½" | 190 | ABC10-54-60 | | 60" | +9 ½" | 230 | ABC15-54-60 | |
| 60" | 36" | +5" | 128 | ABC10-60-36 | 60" | 36" | +5" | 154 | ABC15-60-36 | |
| | 42" | +6" | 147 | ABC10-60-42 | | 42" | +6" | 178 | ABC15-60-42 | |
| | 48" | +7 ½" | 164 | ABC10-60-48 | | 48" | +7 ½" | 200 | ABC15-60-48 | |
| | 54" | +8 ½" | 182 | ABC10-60-54 | | 54" | +8 ½" | 225 | ABC15-60-54 | |
| | 60" | +9 ½" | 202 | ABC10-60-60 | | 60" | +9 ½" | 248 | ABC15-60-60 | |
| | 66" | +10 ½" | 222 | ABC10-60-66 | | 66" | +10 ½" | 265 | ABC15-60-66 | |
| 66" | 72" | +12" | 241 | ABC10-60-72 | 66" | 72" | +12" | 297 | ABC15-60-72 | |
| | 36" | +5" | 132 | ABC10-66-36 | | 66" | 36" | +5" | 165 | ABC15-66-36 |
| | 48" | +7 ½" | 175 | ABC10-66-48 | | | 48" | +7 ½" | 217 | ABC15-66-48 |
| 60" | +9 ½" | 215 | ABC10-66-60 | 60" | +9 ½" | | 267 | ABC15-66-60 | | |
| 72" | 36" | +5" | 145 | ABC10-72-36 | 72" | 36" | +5" | 178 | ABC15-72-36 | |
| | 48" | +7 ½" | 187 | ABC10-72-48 | | 48" | +7 ½" | 231 | ABC15-72-48 | |
| | 60" | +9 ½" | 230 | ABC10-72-60 | | 60" | +9 ½" | 285 | ABC15-72-60 | |

*Height differential based on forklift use.

Standard Features:

- 11" Lip (Optional 14" Lip)
- 4" Steel Curbs
- 9" and 13" Locking Legs
- Lift Chain Option



Aluminum Dockboard Specifications (Welded Aluminum Curbs)

10,000# Gross Capacity

| Width | Length | Height Diff.* | Weight | Model Number |
|-------|--------|---------------|--------|--------------|
| 54" | 30" | +4" | 99 | ATR10-54-30 |
| | 36" | +5" | 114 | ATR10-54-36 |
| | 42" | +6" | 130 | ATR10-54-42 |
| | 48" | +7 ½" | 158 | ATR10-54-48 |
| | 54" | +8 ½" | 174 | ATR10-54-54 |
| | 60" | +9 ½" | 191 | ATR10-54-60 |
| | 66" | +10 ½" | 208 | ATR10-54-66 |
| | 72" | +12" | 225 | ATR10-54-72 |
| | 78" | +13" | 264 | ATR10-54-78 |
| | 84" | +14" | 285 | ATR10-54-84 |
| 60" | 30" | +4" | 120 | ATR10-60-30 |
| | 36" | +5" | 138 | ATR10-60-36 |
| | 42" | +6" | 157 | ATR10-60-42 |
| | 48" | +7 ½" | 189 | ATR10-60-48 |
| | 54" | +8 ½" | 209 | ATR10-60-54 |
| | 60" | +9 ½" | 229 | ATR10-60-60 |
| | 66" | +10 ½" | 249 | ATR10-60-66 |
| | 72" | +12" | 271 | ATR10-60-72 |
| | 78" | +13" | 313 | ATR10-60-78 |
| | 84" | +14" | 338 | ATR10-60-84 |
| 72" | 30" | +4" | 141 | ATR10-72-30 |
| | 60" | +9 ½" | 266 | ATR10-72-60 |
| 84" | 30" | +4" | 177 | ATR10-84-30 |
| | 60" | +9 ½" | 332 | ATR10-84-60 |

12,000# Gross Capacity

| Width | Length | Height Diff.* | Weight | Model Number |
|-------|--------|---------------|--------|--------------|
| 54" | 30" | +4" | 114 | ATR12-54-30 |
| | 36" | +5" | 133 | ATR12-54-36 |
| | 42" | +6" | 151 | ATR12-54-42 |
| | 48" | +7 ½" | 173 | ATR12-54-48 |
| | 54" | +8 ½" | 191 | ATR12-54-54 |
| | 60" | +9 ½" | 210 | ATR12-54-60 |
| | 66" | +10 ½" | 229 | ATR12-54-66 |
| | 72" | +12" | 269 | ATR12-54-72 |
| | 78" | +13" | 289 | ATR12-54-78 |
| | 84" | +14" | 312 | ATR12-54-84 |
| 60" | 30" | +4" | 125 | ATR12-60-30 |
| | 36" | +5" | 144 | ATR12-60-36 |
| | 42" | +6" | 165 | ATR12-60-42 |
| | 48" | +7 ½" | 189 | ATR12-60-48 |
| | 54" | +8 ½" | 208 | ATR12-60-54 |
| | 60" | +9 ½" | 229 | ATR12-60-60 |
| | 66" | +10 ½" | 249 | ATR12-60-66 |
| | 72" | +12" | 291 | ATR12-60-72 |
| | 78" | +13" | 313 | ATR12-60-78 |
| | 84" | +14" | 338 | ATR12-60-84 |
| 72" | 30" | +4" | 159 | ATR12-72-30 |
| | 60" | +9 ½" | 292 | ATR12-72-60 |
| 84" | 30" | +4" | 198 | ATR12-84-30 |
| | 48" | +7 ½" | 297 | ATR12-84-48 |
| | 60" | +9 ½" | 361 | ATR12-84-60 |

15,000# Gross Capacity

| Width | Length | Height Diff.* | Weight | Model Number |
|-------|--------|---------------|--------|--------------|
| 60" | 30" | +4" | 125 | ATR15-60-30 |
| | 36" | +5" | 144 | ATR15-60-36 |
| | 42" | +6" | 165 | ATR15-60-42 |
| | 48" | +7 ½" | 189 | ATR15-60-48 |
| | 54" | +8 ½" | 224 | ATR15-60-54 |
| | 60" | +9 ½" | 247 | ATR15-60-60 |
| | 66" | +10 ½" | 270 | ATR15-60-66 |
| | 72" | +12" | 291 | ATR15-60-72 |
| 72" | 30" | +4" | 159 | ATR15-72-30 |
| | 48" | +7 ½" | 240 | ATR15-72-48 |
| | 60" | +9 ½" | 309 | ATR15-72-60 |

*Height differential based on forklift use.

Standard Features:

- 11" Lip (Optional 14" Lip)
- 4" Aluminum Curbs
- 9" and 13" Locking Legs