

# AMERICA'S ULTIMATE YARD RAMP



## THE #1 CHOICE OF DOCK CREWS

- ✓ Easiest to Position
- ✓ Fastest Raise Time
- ✓ Greatest Stability



Choose Copperloy® Yard Ramps when you want the **best mobile solution** for ground level access to trucks, railcars or buildings. Instantly create a loading facility without new construction. Maximum capacities up to 35,000 lbs. Many models in stock and ready to ship next day.



### Hydraulic Hand Pump

- ✓ Effortless for the operator to quickly adjust ramp height
- ✓ Raises 1/2" with each pump
- ✓ Raises 2.5 x faster than standard ramps
- ✓ Raises 20 x faster than caster wheel ramps
- ✓ Easy access outside the frame for adjustment & maintenance
- ✓ Handle is stored out of the way



### Single Cylinder Design

- ✓ Raises evenly with one-cylinder system
- ✓ Requires fewer pumps to raise to the desired position



by JH INDUSTRIES, INC.

# MORE FEATURES



by JH INDUSTRIES, INC.

## THE #1 CHOICE IN MOBILE YARD RAMP

- ✓ Easiest to Position
- ✓ Fastest Raise Time
- ✓ Greatest Stability




### Positioning Sleeve (Standard on all steel models)

- ✓ 180 degree motion to maneuver in tight spaces
  - ✓ Three point connection
  - ✓ A durable means of positioning the ramp
- Not intended for long-distance towing.*



### 15" Lip Overlap

- ✓ Deep overlap of frame for secure connection
- ✓ 8' long safety chains and hooks for added safety & security

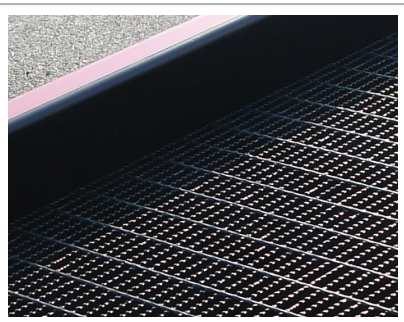

### Deck Grating & Curb

- ✓ Electro-forged serrated steel grating
- ✓ Superior strength & traction
- ✓ 7" curb prevents accidental vehicle runoff



### 8-Foot Level Off Section

- ✓ Provides easy access to trucks and loading docks alike
- ✓ Provides more room to get those hard to reach loads on the back of the truck



### Low End Plate (36" Long)

- ✓ Approach plate is beveled from the underside to provide a smooth ground-level entry, eliminating jolts and bumps when forklifts travel



### Solid/Pneumatic Tires (Standard on all steel models)

- ✓ Premium 18" tires, ideal for use in all applications
- ✓ Maintenance-free
- ✓ Performs well with regular or bumpy surfaces

330-963-4105 · 800-321-4968 · [www.copperloy.com](http://www.copperloy.com)

1981 East Aurora Road · Twinsburg, Ohio 44087

# AMERICA'S ULTIMATE YARD RAMP

## MOBILE YARD RAMP SPECIFICATIONS

### Steel Ramps with Steel Grating

Capacity	Length	Overall Width	Usable Width	Approx. Weight	Height Range	Model Number
16,000	36'	70"	62"	5,350	38" – 65"	SYR16-70-36PL8
16,000	36'	84"	76"	5,990	38" – 65"	SYR16-84-36PL8
16,000	36'	96"	88"	6,700	38" – 65"	SYR16-96-36PL8
20,000	36'	70"	62"	5,480	38" – 65"	SYR20-70-36PL8
20,000	36'	84"	76"	6,120	38" – 65"	SYR20-84-36PL8
20,000	36'	96"	88"	6,910	38" – 65"	SYR20-96-36PL8
25,000	36'	70"	62"	6,440	38" – 65"	SYR25-70-36PL8
25,000	36'	84"	76"	7,130	38" – 65"	SYR25-84-36PL8
30,000	36'	84"	76"	7,870	38" – 65"	SYR30-84-36PL8

### Aluminum Ramps with Steel Grating

Capacity	Length	Overall Width	Usable Width	Approx. Weight	Height Range	Model Number
16,000	36'	70"	62"	4,700	38" – 65"	AS16-70-36PL8
16,000	36'	84"	76"	5,600	38" – 65"	AS16-84-36PL8
20,000	36'	70"	62"	4,800	38" – 65"	AS20-70-36PL8
20,000	36'	84"	76"	5,700	38" – 65"	AS20-84-36PL8
25,000	36'	70"	62"	4,900	38" – 65"	AS25-70-36PL8
25,000	36'	84"	76"	5,920	38" – 65"	AS25-84-36PL8

#### Standard Features:

- ✓ Steel or Aluminum I-Beam Construction
- ✓ 7" Steel Curbs / 7" Aluminum Curbs
- ✓ 36' in Length
- ✓ 8' Level-Off
- ✓ 30" Approach Ramp
- ✓ 15" Lip
- ✓ 1 ¾" Serrated Steel Grating
- ✓ 18" Solid/Pneumatic Tires
- ✓ Single Acting Hydraulic Pump
- ✓ Positioning Sleeve (180° rotation)
- ✓ Safety Chains

#### Options

- ✓ Tow-Bar



by JH INDUSTRIES, INC.